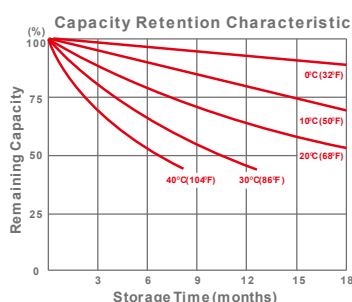
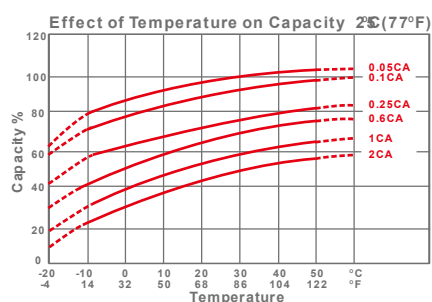
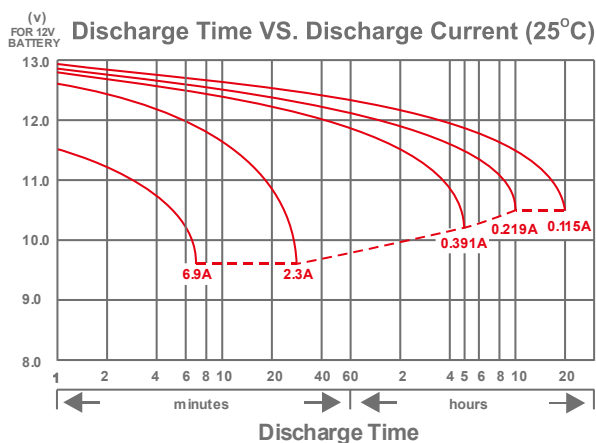
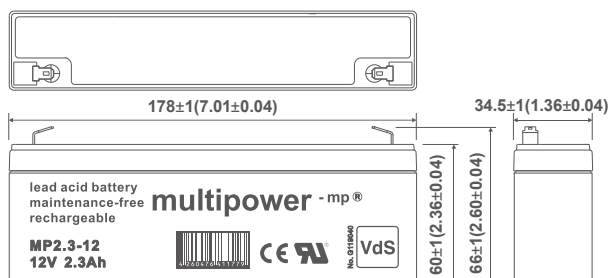



MP2,3-12

Nominal Voltage(V) 12V

Nominal Capacity

20 hour rate	(0.115A	to	10.50V)	2.300Ah
10 hour rate	(0.219A	to	10.50V)	2.185Ah
5 hour rate	(0.391A	to	10.20V)	1.955Ah
1 C	(2.3A	to	9.60V)	1.150Ah
3 C	(6.9A	to	9.60V)	0.805Ah

Weight Approx.: 860g (1.89Lbs.)

Internal Resistance (at 1KHz) Approx. 60 mΩ

Maximum Discharge Current for 5 seconds: 34.5A

Charging Methods at 25°C (77°F)

Maximum Charging Current : 0.69A

Standby use:

Float Charging Voltage 13.5 to 13.8V
Coefficient -3.0mV/°C/cell

Operating Temperature Range

Charge	-15°C (5°F)	to	40°C (104°F)
Discharge	-15°C (5°F)	to	50°C (122°F)
Storage	-15°C (5°F)	to	40°C (104°F)

Charge Retention (shelf life) at 20°C (68°F)

1 month	97%
3 month	92%
6 month	85%

Case Material ABS UL94 HB

Terminal F1 (Faston Tab 187)